




## DIGITAL LAMINATING FILMS

**DIGITAL LAMINATING FILMS WITH ADDED UV INHIBITORS, DESIGNED FOR SUPERIOR CLARITY AND COLOR ENHANCEMENT.**

**WITH LIGHTFAST™ TECHNOLOGY FOR WIDE FORMAT IMAGING.**

- Engineered for large format output.
- Specifically designed to laminate at 185°F to accommodate the new types of inks used in today's wide format imaging: ink jet, electrostatic or thermal transfer technologies.
- Increases rigidity and strength of media.
- Exhibits excellent adhesion and consistent roll uniformity.
- Preserves graphic images over time and protects against moisture, handling and abrasion.

PRODUCT STOCKING PROGRAM AVAILABLE FOR 24-HOUR SHIPMENT, THROUGH AUTHORIZED TRANSILWRAP DISTRIBUTORS.

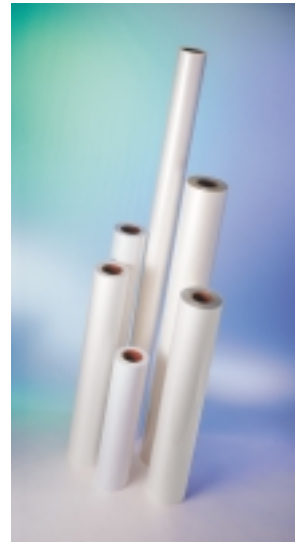


**AVAILABLE IN WIDTHS FROM 25 TO 76 INCHES.**

**LIGHTFAST™ TECHNOLOGY**


Transilwrap's LIGHTFast™ technology uses specially formulated UV inhibitors to absorb the damaging light wavelengths that cause fading and protects the vibrant color produced by today's high-tech printers.

The charts shown below indicate the potential UV damage without LIGHTFast™ and the light absorbance provided by Transilwrap's LIGHTFast™ technology.

**Potential UV Damage**



**LIGHTFast™ Protection**

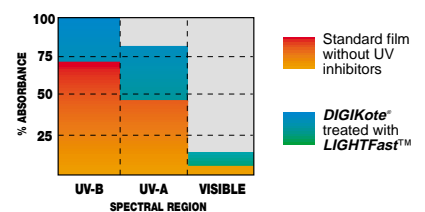

## GLOSS/SATIN

### DESCRIPTION

DIGIKote® Gloss/Satin Films are specially engineered with UV inhibitors and LIGHTFast™ technology to reduce graphic fade and protect against moisture. DIGIKote® gloss/satin films feature adhesives that enhance clarity by sealing at 185°F. The films' low sealing temperature helps preserve inks in digitally printed graphics, which can deteriorate at high temperatures.

	1.7	.5/2.5	1/2	2/3	3/2	4/6	7/3
Gauge	1.7	.003		.005		.010	
Finish	Gloss	Satin	Gloss	Satin & Gloss		Gloss	
Slit Widths Available (see below)							
Lengths Available (see below)							

### SLIT WIDTHS

■ 25", 38", 43", 51", 55"     
 ■ 25", 38", 43", 51", 55", 62", 76"     
 ■ 25", 38", 43", 51", 55", 62"

### LENGTHS

■ 500'     
 ■ 25" thru 55" - 250', 500'     
 ■ S - 25" thru 51" - 250', 500'; 55" thru 76" - 250'  
 G - 25" thru 55" - 250', 500'; 62" & 76" - 250'     
 ■ 25" - 500'; 38" & 43" - 250', 500'  
 51", 55", 62" - 250'     
 ■ 25" - 250', 500'; 38", 43", 51", 55" - 250'  
 62" - 200'; 76" - 150'     
 ■ 25" - 500'; 38", 43", 51", 55" - 250'  
 62" - 200'

## MATTE

### DESCRIPTION

DIGIKote® Matte Laminating Film is a 3 mil low melt, thermally activated laminate especially designed for applications that require enhanced glare reduction such as trade show graphics and point of purchase displays.

**Slit Widths Available: 25", 38", 43", 51", 55", 62"**  
**Length Available: 500'**

## DISPLAY WHITE OPAQUE

### DESCRIPTION

DIGIKote® Display White Opaque is a rigid, low melt, thermally activated, white opaque laminating film that has been specially produced for pop-up and display applications that require no back light influence for large format graphics. Display White Opaque is an exceptional film that offers 100% dead white opacity, and gives wide format printers the option to produce two-sided images without light transference.

**Slit Widths Available: 5 & 10 mil - 38", 43", 51", 55", 62"**  
**Lengths Available: 5 & 10 mil - 38" thru 55" - 250'**  
 5 mil - 62" - 250'; 10 mil - 62" - 200'


**TRANSILWRAP COMPANY, INC.**  
 9201 W. Belmont Ave.  
 Franklin Park, IL 60131  
 (847) 678-1800  
[www.transilwrap.com](http://www.transilwrap.com)

BETHLEHEM, PA • CHICAGO • CLEVELAND  
 DALLAS • LOS ANGELES • RICHMOND, IN  
 MONTREAL • TORONTO • VANCOUVER

## HARD COAT LUSTRE

### DESCRIPTION

DIGIKote® Hard Coat Lustre is a low melt, thermally activated laminate which is top coated with a UV cured hard coat formula designed to offer maximum scuff and scratch resistance. The film offers excellent glare reduction under bright light conditions and is ideal for trade show graphics and point of purchase displays that require extra durability.

**Slit Widths Available: 5 mil - 38", 43", 51", 55"; 10 mil - 25", 38", 51", 55"**  
**Length Available: 250'**

## DISPLAY LUSTRE

### DESCRIPTION

DIGIKote® Display Lustre is a low melt, thermally activated, textured surface laminating film that is specially designed for laminating pop-up display panels and other trade show graphics. Display Lustre has a scratch resistant, non-reflective surface for graphic enhancement. It allows brilliant color enhancement and has the ability to withstand the rugged environments often required by trade show graphics and point of purchase displays, while minimizing reflectivity of bright light surroundings.

**Slit Widths Available: 6 mil - 38", 51", 62", 76"**  
**Length Available: 250'**

**FOR MORE INFORMATION, CALL:**  
**800-745-5802 in the U.S.A.**  
**800-268-4108 in Canada**  
**or 001-847-233-4118 in Europe**

