




WalkerTalker® Vinyl Base Component*

DESCRIPTION:

The WalkerTalker® floor graphics printable component is a white, vinyl film with a removable pressure sensitive adhesive and a 90 lb. release liner. The surface is treated to provide adhesion for various printing inks. The acrylic removable adhesive is specifically designed for high performance removable applications.

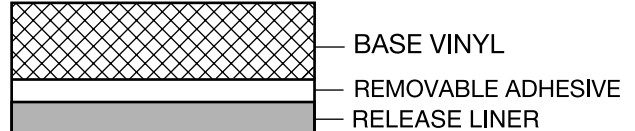

CHARACTERISTICS:

- Excellent slip resistance, passed UL 410 "Floor Coating and Finishing Material" (*slip resistance only when used as part of WalkerTalker® system*).
- Excellent anti-curl properties assure economical performance through printing and coating operations.
- Excellent UV stability and resistance to thermal aging.
- Easy stripping liner with minimal adhesive "pick".
- Water, oil, acid, and alkalai resistant.
- Can be die-cut.
- Printable using offset, screen, digital screen and flexo processes.

TECHNICAL DATA:

PROPERTIES		TYPICAL VALUES	TEST
THICKNESS	VINYL	.0034" ± 10%	
	ADHESIVE	.0008 to .001"	
	LINER	.0063 to .0073"	
ADHESION at Room Temperature	STAINLESS STEEL	10 to 16 oz. /in 0.625 to 1.0 lbs/in	PSTC 1 - 15 Min. @ RT
		16 to 24 oz. /in 1.0 to 1.5 lbs/in	PSTC 1 - 24 Hrs. @ RT
LINER RELEASE at 180° Grams/2 inch width - 180° Peel		30-70 gms/2 in	PSTC 1 - Modified 400 in./Min. 180° peel of liner from vinyl
YIELD		≈ 2400 sq in/lb	

Note: All information and recommendations should be used as a guide and not for specification purposes. Furnishing this information does not constitute a warranty. All purchasers shall independently determine the suitability of the material for the purpose for which it is purchased. Users shall assume all risks resulting from the use of our products and must confirm adaptability thereof by their own tests. Liability will in no event exceed value of the material sold.

* WalkerTalker® Vinyl Base Component is only sold as a companion to WalkerTalker® overlaminating components.






WalkerTalker® Overlaminat*^{*}

DESCRIPTION:

The WalkerTalker® floor graphics overlaminat component is a scratch resistant film with a water-clear permanent pressure sensitive adhesive. The overlaminat is a calendered film processed to provide a satin (mar resistant) first surface. The acrylic adhesive used has been formulated for high tack and high peel adhesion.

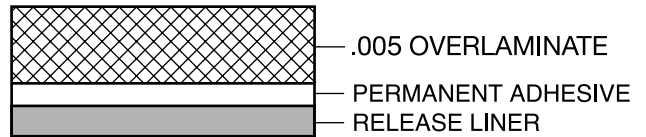

CHARACTERISTICS:

- Excellent slip resistance, passed UL 410 "Floor Coating and Finishing Material" (slip resistance only when used as part of WalkerTalker® system).
- Excellent UV stability and resistance to thermal aging.
- Easy stripping liner with minimal adhesive "pick".
- Superior scratch resistance and wear.
- Water, oil, acid, and alkali resistant.
- Can be die-cut.

TECHNICAL DATA:

PROPERTIES		TYPICAL VALUES	TEST
THICKNESS	VINYL	.0045" ± 10%	
	ADHESIVE	.0008 to .001"	
	LINER	.0038 to .0042"	
ADHESION at Room Temperature	STAINLESS STEEL	48 to 56 oz. /in 3.0 to 3.5 lbs/in	PSTC 1 - 15 Min. @ RT
		76 to 84 oz. /in 4.75 to 5.25 lbs/in	PSTC 1 - 24 Hrs. @ RT
LINER RELEASE at 180°	Grams/2 inch width - 180° Peel	30-70 gms/2 in	PSTC 1 - Modified 400 in./Min. 180° peel of liner from vinyl
YIELD		≈ 2700 sq in/lb	

Note: All information and recommendations should be used as a guide and not for specification purposes. Furnishing this information does not constitute a warranty. All purchasers shall independently determine the suitability of the material for the purpose for which it is purchased. Users shall assume all risks resulting from the use of our products and must confirm adaptability thereof by their own tests. Liability will in no event exceed value of the material sold.

* WalkerTalker® Overlaminat is only sold as a companion to WalkerTalker® base components.

